

FIG. 1

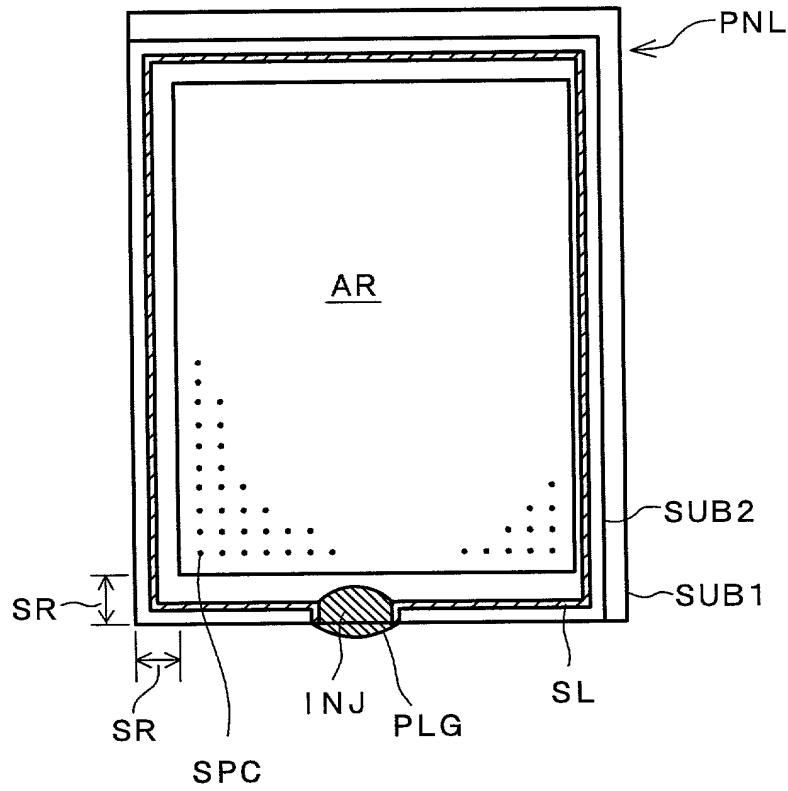


FIG. 2

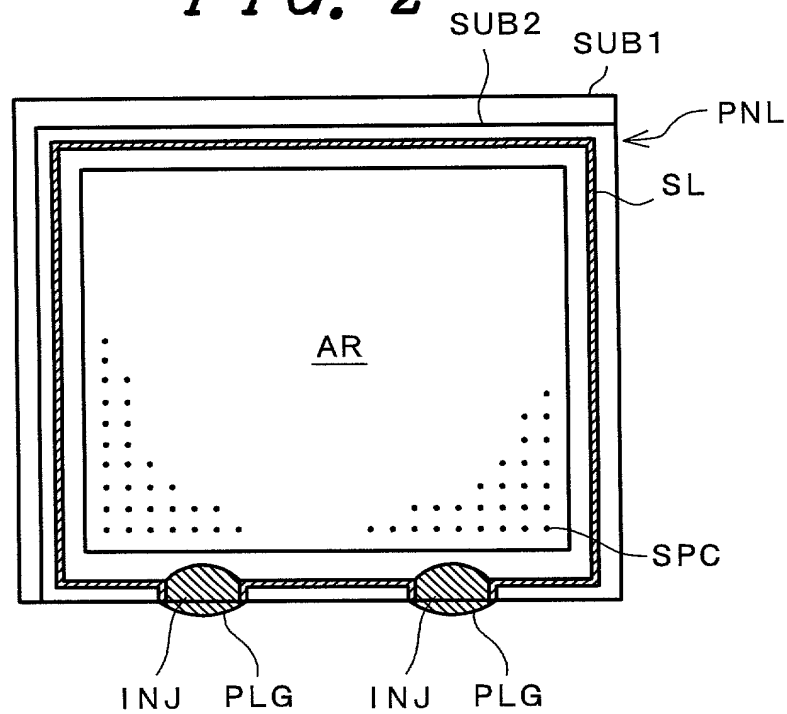


FIG. 3

MEASUREMENT CONDITIONS OF GC/MS

ANALYZER	M7200GC/MS
CONDITIONS OF GAS CHROMATOGRAPH (GC)	
COLUMN USED DB-5MS	0. 25 mmφ×30 m
CAPILLARY COLUMN SIZE	
CARRIER GAS HELIUM	
TEMPERATURE OF INJECTING PORT	260°C
COLUMN TEMPERATURE	FROM 100°C TO 280°C (TEMPERATURE INCREASE RATE: 5°C/MINUTE)
TRANSFER LINE TEMPERATURE	250°C
CONDITIONS OF GAS SPECTROMETER (MS)	
RANGE OF MASS NUMBER TO BE MEASURED	M/Z: 40-650
ION SOURCE TEMPERATURE	230°C
IONIZING METHOD	ELECTRON IMPACT (EI) METHOD

FIG. 4

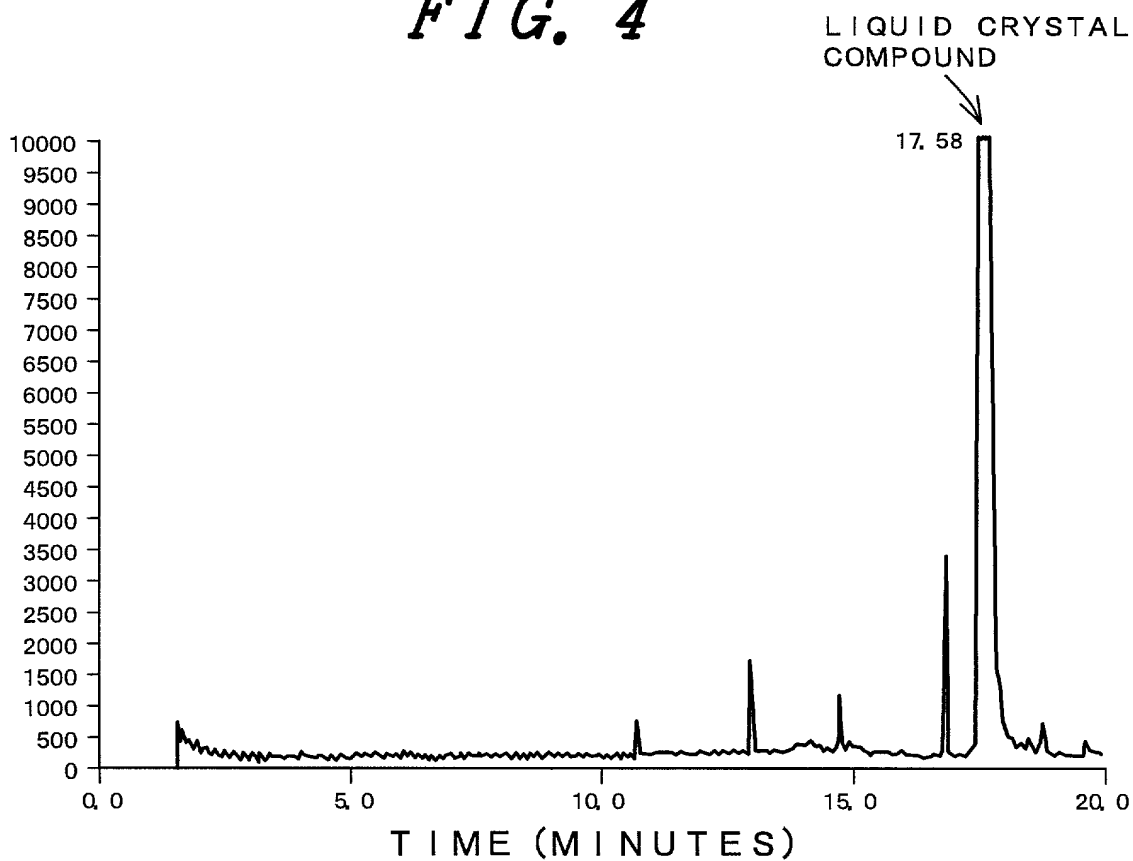


FIG. 5

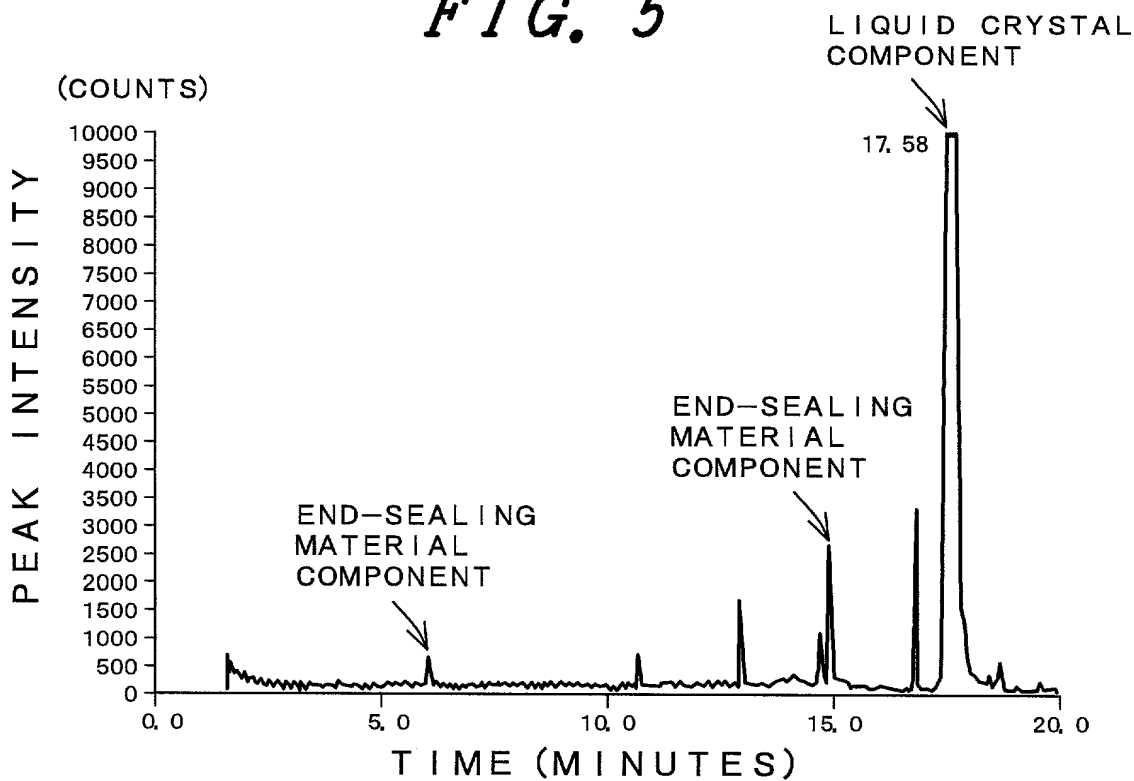


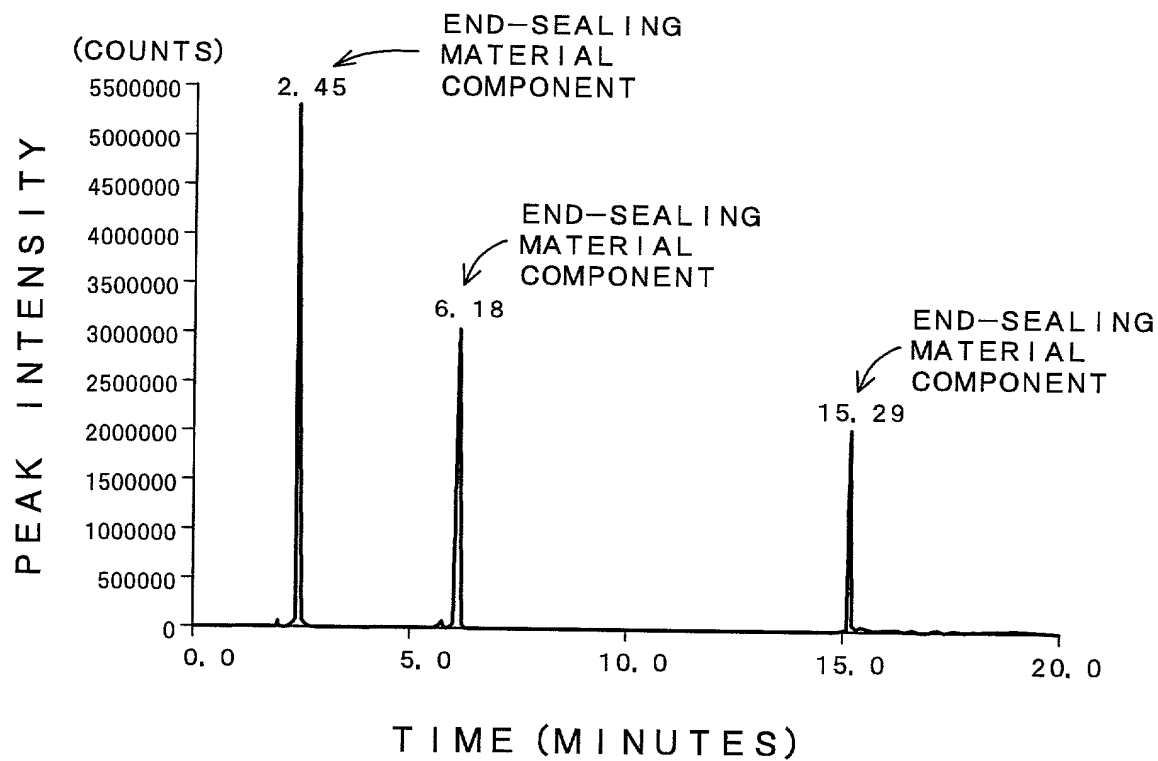
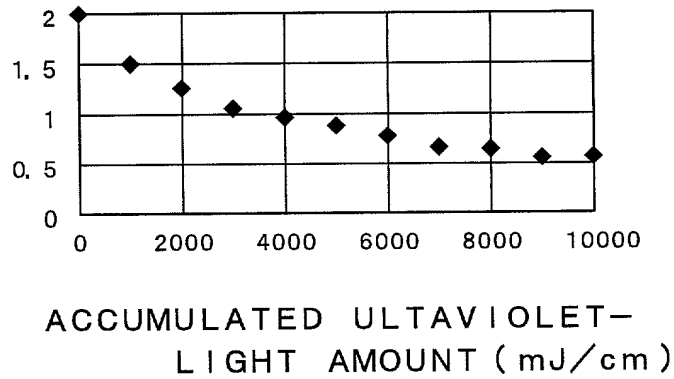
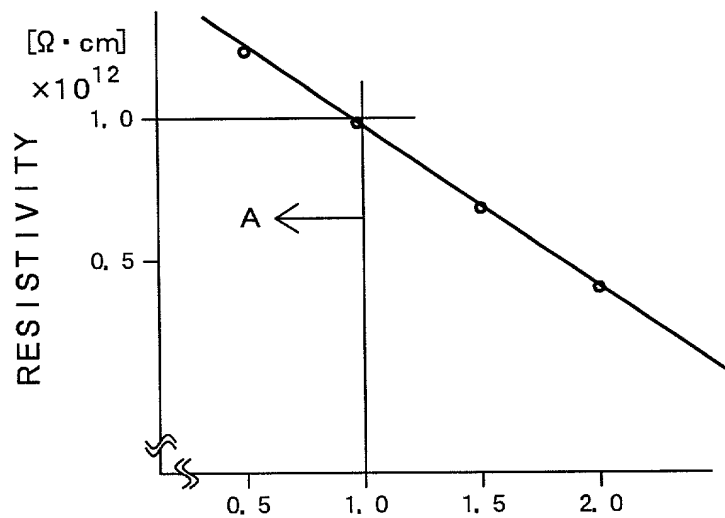
FIG. 6

FIG. 7

AMOUNT OF CONSTITUTENT
COMPONENTS OF END-
SEALING MATERIAL WITH
RESPECT TO PEAK AREA
(10, 000) OF LIQUID
CRYSTAL COMPOUND

**FIG. 8**

AMOUNT OF CONSTITUTENT
COMPONENTS OF END-
SEALING MATERIAL WITH
RESPECT TO PEAK AREA
(10, 000) OF LIQUID
CRYSTAL COMPOUND

FIG. 9

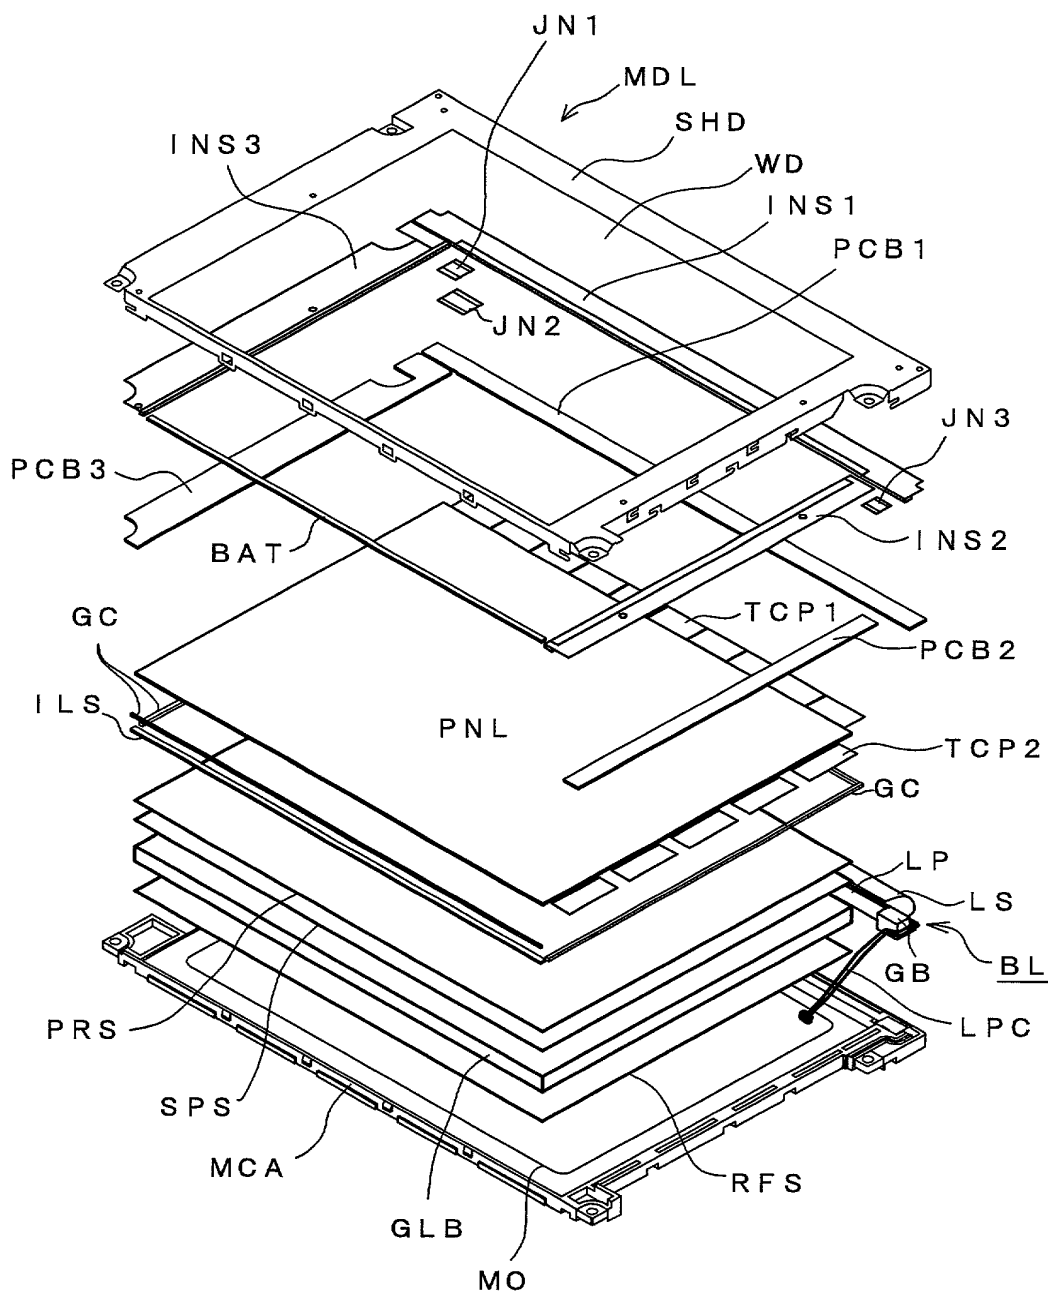


FIG. 10

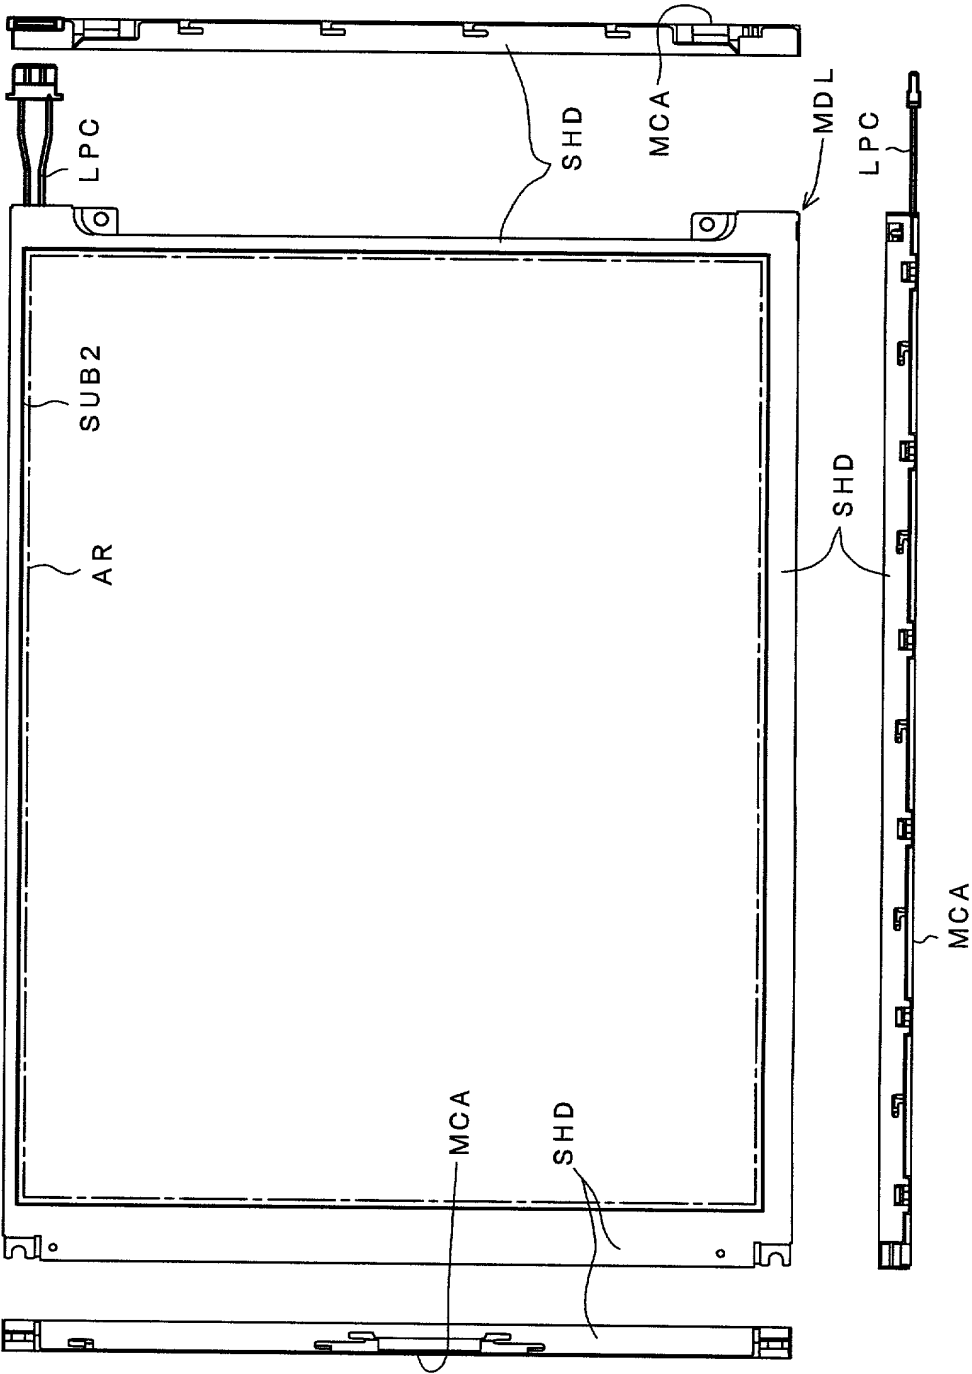


FIG. 11

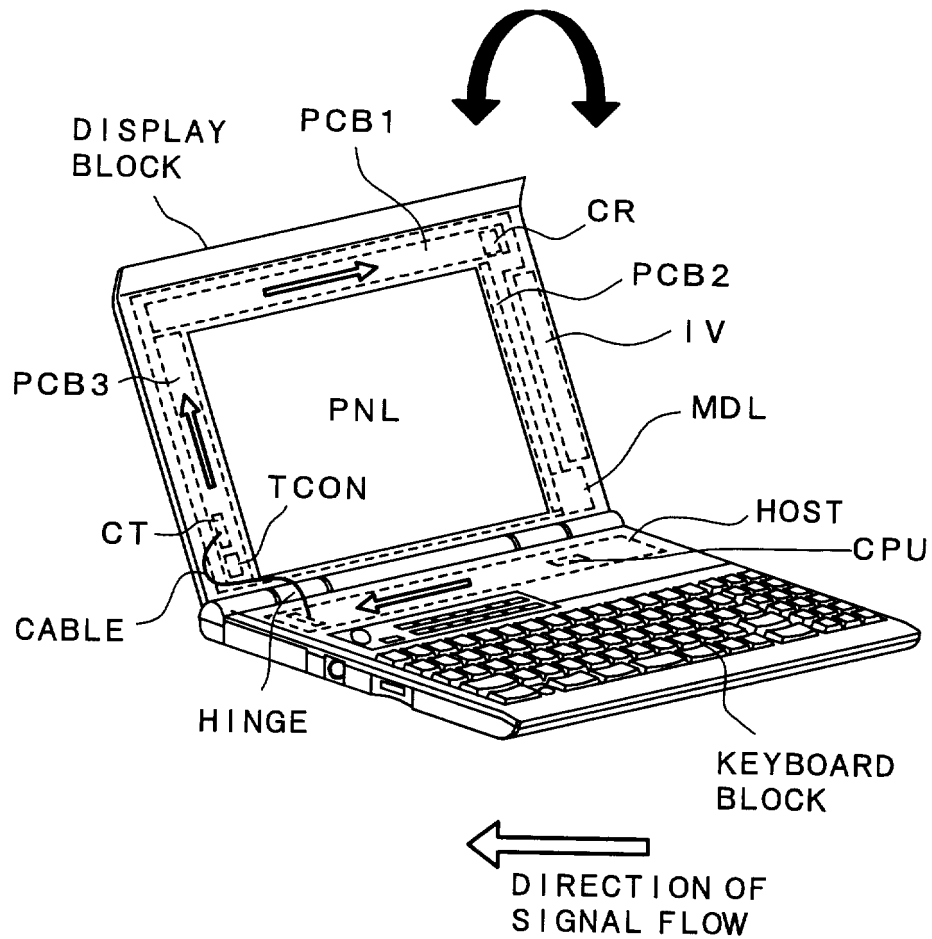


FIG. 12

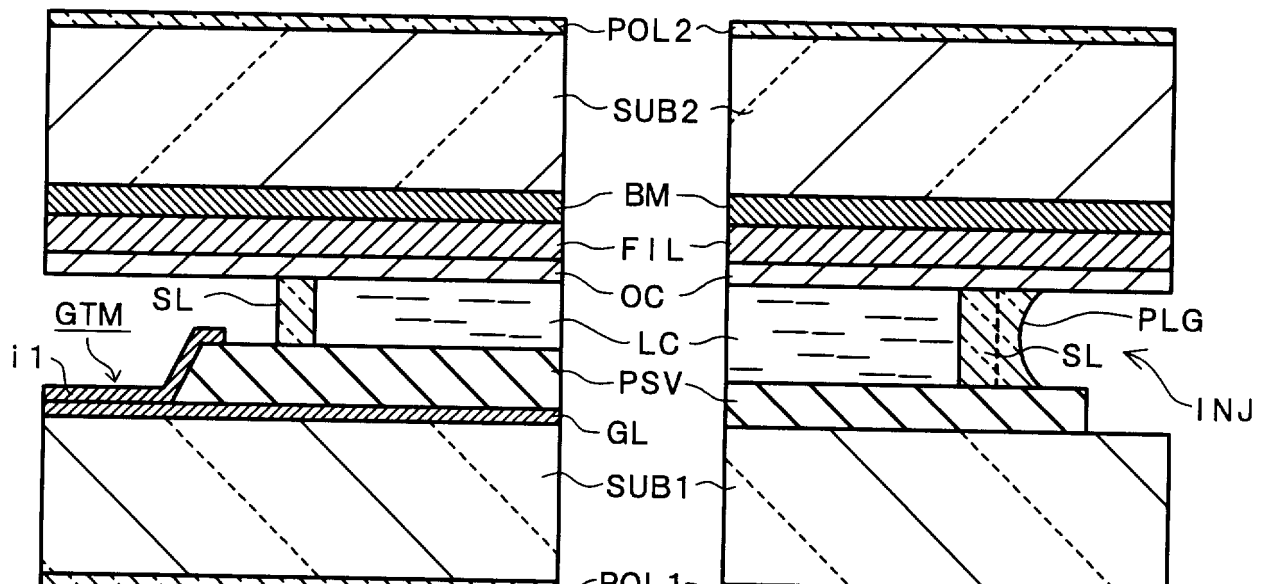
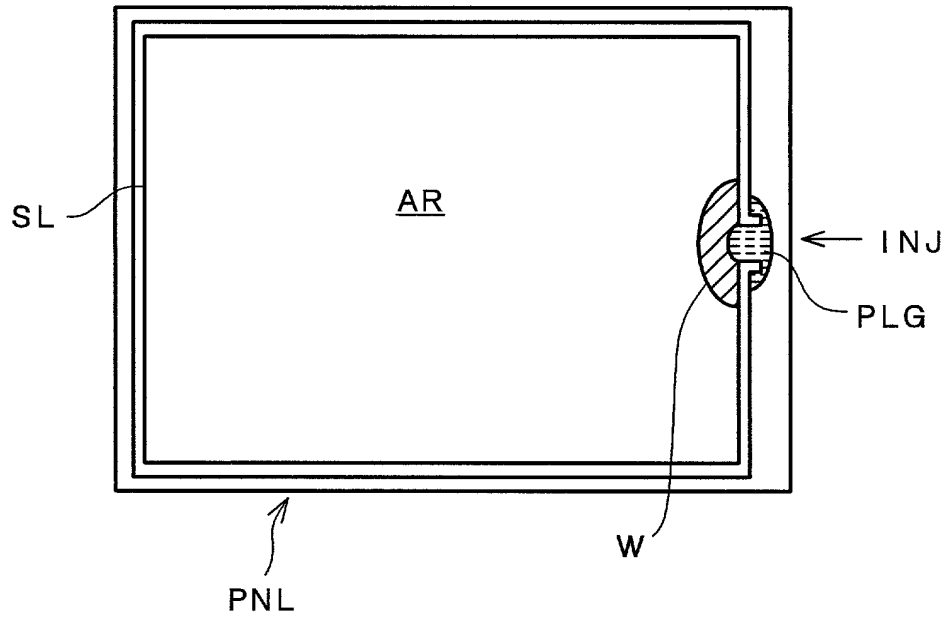
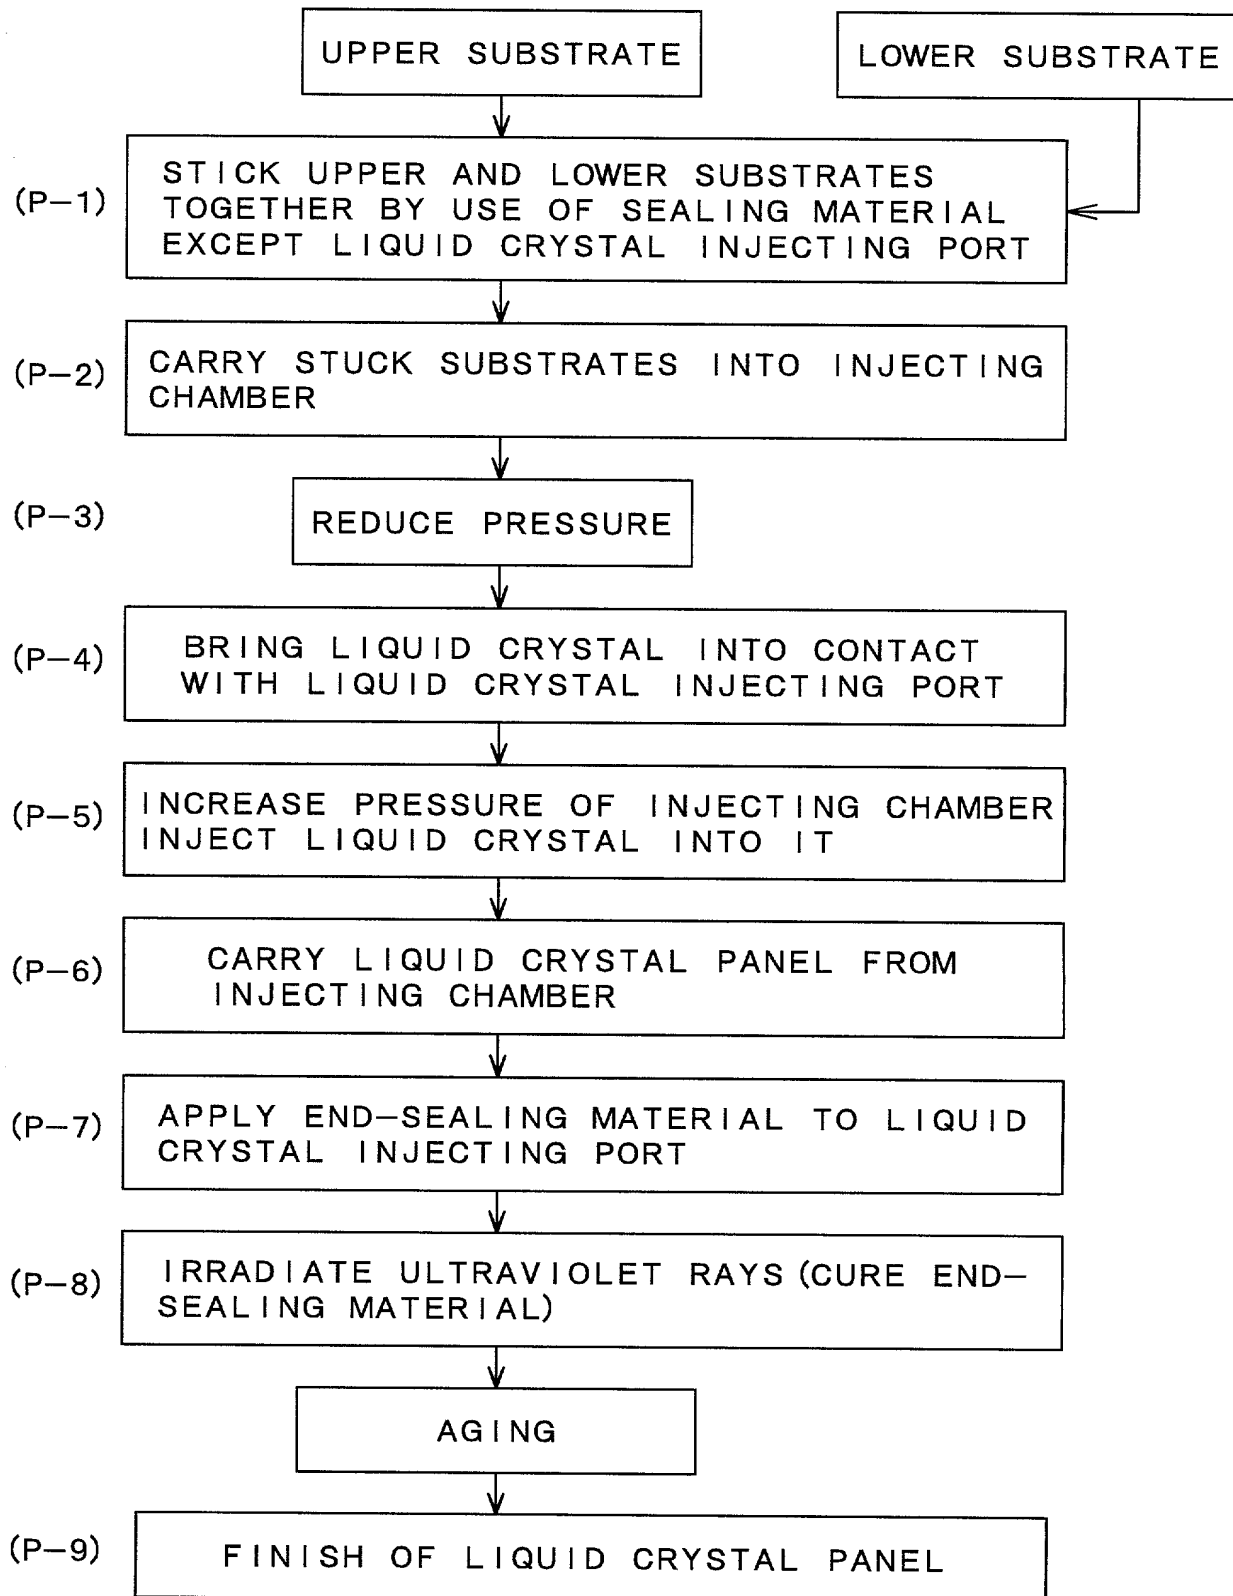


FIG. 13



09987352-1.1401

FIG. 14

TOP SECRET 25E/3660